




Viraj 6574 Prismatic Direct I Recessed

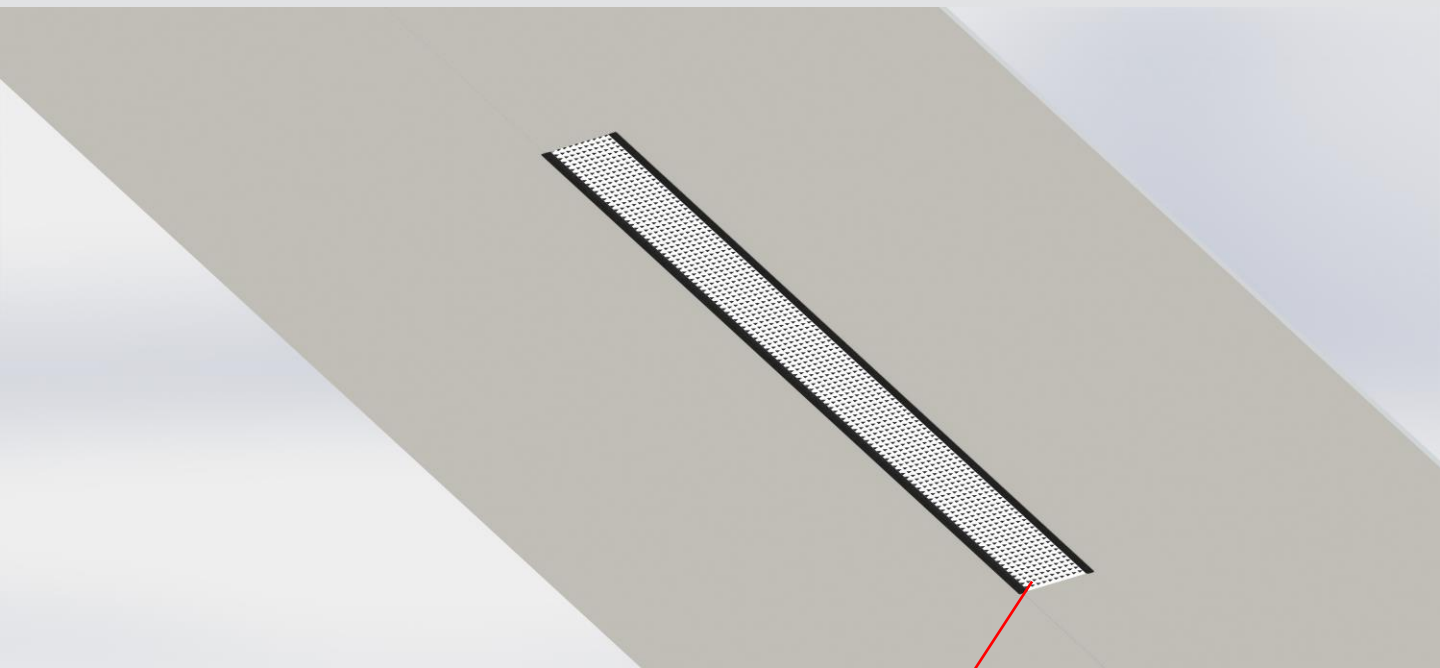

Micro Prismatic Diffuser


Model no : DLTLV6574DRD-30



Low-power LEDs



3000K



IP40



Excellent thermal
management

MACADAM 3

Structure and Characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features

1 - Optics

Micro Prismatic Diffuser

2 - LED Module

30W

3 - Luminaire head and housing

Aluminum extrusion

4 - Control Gear

NON-Dimmable/Dali-Dimmable


5 - Protection Mode

IP40

6 - CCT

3000K

Construction

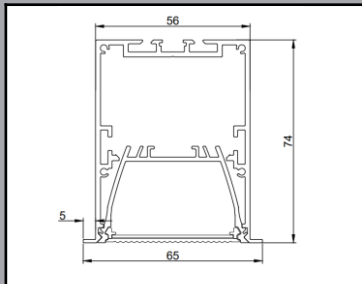

Dimensions

L=1200mm
W=54mm
With trim W=65mm
H=74mm

Efficacy

109.7 lm/W

CRI

≥80

Mounting

Recessed

Life Span

L70 ≥60000H

Light distribution

Direct

Dimming

NON-Dimmable/
Dali-Dimmable

Housing Finish

Powder coated

Led Module

30W

CCT

3000K

Input Voltage

220-240 Vac

Power Factor (PF)

0.95

McAdam

3rd

UGR

≤19

