

# Flexion 90 Direct Recessed Downlighter



**Model no :** DLTOF90DRM-15

Flexion 90 downlighter gives long life, good color rendering and fast response. The design of the LED downlight is more beautiful and light. It can maintain the overall unity and perfection of the building decoration during installation.



Low-power LEDs



3000K



IP40



Excellent thermal management

McAdam 3

# Structure and Characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features

## 1 - Optics

Lens Et Reflector

## 2 - LED Module

15W

## 3 - Luminaire head and housing

Aluminum die-cast

## 4 - Control Gear

Non-Dimmable/Dali-2.0 Dimmable


## 5 - Protection Mode

IP40

## 6 - Variant on request

3000K

Dimensions

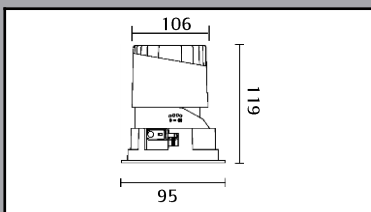

Dimensions

Outer DA $\varnothing$ =106mm  
Cutout dia=95mm  
H=119mm

Efficacy

95 lm/W

CRI

≥80

Mounting

Recessed

Life Span

L70 (60,000H)

UGR

≤19

Beam angle

10°/24°/38°/60°

Dimming

Non-Dimmable/  
Dali-2.0 Dimmable

Housing Finish

Powder coated

Led Module

15W

CCT

3000K

Input Voltage

220-240 Vac

Power Factor (PF)

0.95

THD

<10%

McAdam

Step 3

