



# Angular Profile Surface

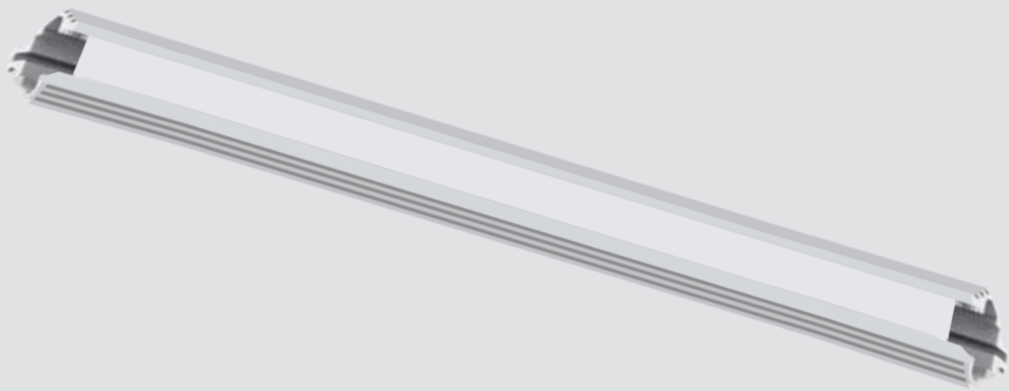

**Model no :** DLTSLG140-15


LED This Corner 45° is a small economical Dot free surface mounted Fully encapsulated anodized aluminum profile which was developed and provide high quality lighting on work surface.



Low-power LEDs



5700K



IP20



Excellent thermal  
management

McAdam 3

# Structure and Characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features

## 1 - Optics

Opal Diffuser

## 2 - LED Module

15.5W/m

## 3 - Luminaire head and housing

Aluminum

## 4 - Control Gear


NON-Dimmable/Dali-2 Dimmable

## 5 - Protection Mode

IP20

## 6 - CCT

5700K

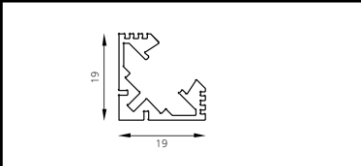Construction		Light Distribution	120°
Dimensions	L=1000mm W=19mm H=19mm	Dimming	NON-Dimmable/ Dali-2 Dimmable
Efficacy	87 lm/W	Color housing	Powder coated
CRI	≥80	Led Module	15.5W/m
Mounting	Surface	Input Voltage	220-240 Vac
Life Span	L70≥ (60,000H)	CCT	5700K
McAdam	3rd	Power Factor (PF)	0.95
		THD	<10%
		UGR	<19

